


Dramix® 3D

80/30GGP

Aspect ratio Length Galvanized Glued Premium

Concrete Reinforcement

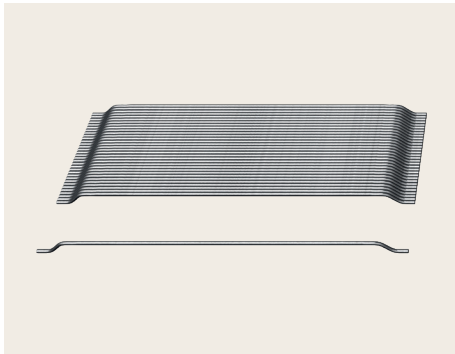

Original anchorage

Dramix® 3D is the cost-efficient fiber for standard statically indeterminate concrete structures that are subjected to regular static, fatigue and dynamic loadings.

High performant strength

Dramix® 3D Premium is a high performant fiber to create optimal ductility in high strength concrete.

Glue technology for three-dimensional reinforcement

Dramix® steel fibers are bundled with water-soluble glue. The glue helps to avoid fiber balling during mixing and ensures a homogeneous distribution of fibers throughout the concrete mix.

Material properties

Nom. tensile strength:
445 ksi (3,070 MPa)
 Young's modulus:
30,458 ksi (210.000 MPa)
 Strain at ultimate strength:
0.8 %

Fiber network

16,205 fibers/lb (35,726 fibers/kg)

Geometry

Fiber family



Length (l) * / Diameter (d)

← 1.2 in. (30 mm) →


↑ 0.01 in. (0.38 mm)

Aspect ratio (l/d) * : 80

* Indicative value


Packaging

BAGS:
44 lb (20 kg)



BIG BAG:
2,425 - 2,645 lb (1,100 - 1,200 kg)

Handling



NO STACKING



KEEP DRY

Product certificates*



System certificates*

Dramix® plants are ISO 9001 and ISO 14001 certified.



Product conformity

Dramix® conforms to ASTM A820, EN 14889-1 and ISO 13270 Class A.

Contact us:

For inquiries and orders on <https://construction.bekaert.com/contact>



For recommendations on stacking, handling, dosing and mixing, visit www.bekaert.com/dosingfibers

Any other specific document or certificate can be found on www.construction.bekaert.com/resources

* Product and system certificates are plant specific.