


DATASHEET



COMPLIANT PRODUCT

The characteristics of Bezinox[®] wire comply with the EN 10257-2:2011 standard. All wires are zinc coated in accordance with EN 10244-2:2009 norm. Core wire composition is in accordance with EN 10088-1: "Stainless steels - Part 1: List of stainless steels". The wires shall have non-magnetic properties in magnetic fields generated by AC currents (50Hz). Bezinox[®] can also be produced as a flat shaped wire.

Technical specifications for a core wire

European Standard	Group	Number Code	Alphanumeric Code	AISI / ASTM	UNS
EN 10088-1*	Austenitic	1.4373	X12CrMnNiN18-9-5	202**	S20200

*for all elements except phosphorus and sulphur (P and S) having P ≤ 0.06 % and S ≤ 0.03 %

** different grade upon request

Mechanical properties for a round Bezinox[®] wire

Nominal diameter	Diameter tolerances	Tensile strength range	Yield strength range	Minimum elongation at break on gauge length L ₀ = 100 mm	Torsion test minimum number of turns
mm	mm	N/mm ²	N/mm ²	%	
2.50 - 3.15	±0.06	650 - 900	300 - 550	25	12
3.16 - 4.00	±0.08				10
4.01 - 5.00	±0.08				8
5.01 - 6.00	±0.09				7
6.01 -	±0.10				-

Coating weight / thickness for a round Bezinox[®] wire

Nominal diameter	Coating weight
mm	g/m ²
2.50 ≤ d < 2.80	245
2.80 ≤ d < 3.20	255
3.20 ≤ d < 3.80	265
3.80 ≤ d < 4.40	275
4.40 ≤ d < 5.20	280
5.20 ≤ d < 8.20	290

Relative magnetic permeability:


Guaranteed value: $\mu_r < 5$



Wrapping test: 6mm Bezinox[®] wire wrapped on a 18mm mandrel

Mechanical properties for a flat Bezinox® wire


We are also offering flat non-magnetic armouring wire with different grades and tesnile strength based on request.

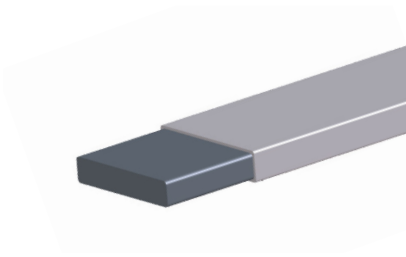

Nominal dimensions mm	Dimension tolerances mm	Tensile strength range N/mm ²
6.00 x 2.00 - 14.00 x 3,5	±0.12 x ± 0,08	400 - 650*
* dependance on grade		



Packaging

Customized packing dimensions available upon request.

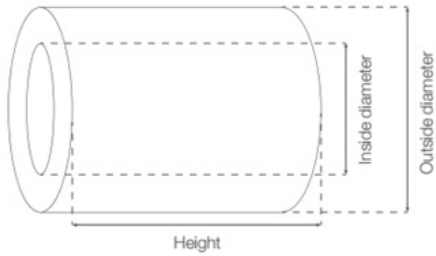


Orbit dimensions

ID	370 mm	580 mm
OD	800 mm	1100 mm (max.)
H	850 mm	1100 mm
Weight	700 kg	2000 kg (max.)

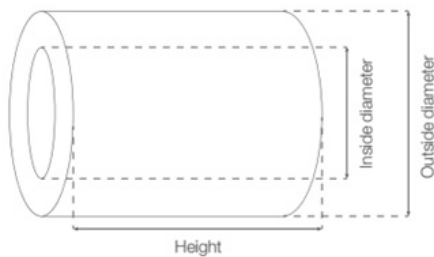

Spool dimensions

ID	500 mm
OD	1000 mm (max.)
H	500 mm
Weight	1500 kg - 1700 kg (max.)



Contact us

More
Information?

T +421 33 7363 194
F +421 33 7363 110

cable.solutions@bekaert.com
www.bekaert.com

Modifications reserved
All details describe our products in general form only.
For ordering and design only use official specifications
and documents. Unless otherwise indicated, all
trademarks mentioned in this brochure are registered
trademarks of NV Bekaert SA or its subsidiaries.
© Bekaert 2020

Responsible editor: NV Bekaert SA