
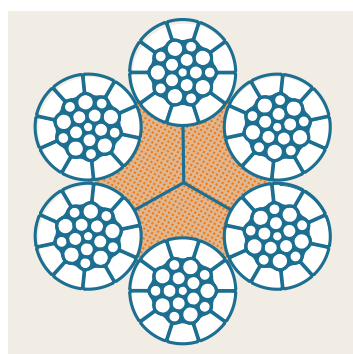


# Dyform



High strength and proven extended rope life - preventing core corrosion and maintaining design diameter.

## 6X26 (10/5 & 5/5/1) POLY CORE



Diameter	Weight	Minimum breaking load	
		Tonnes	kN
mm	kg/100 mtr		
16	103.3	17.1	168
18	129.1	21.6	212
20	159.7	26.7	262
22	191.7	32.3	317
24	224.8	38.5	377
26	271.5	45.1	443
28	317.4	52.4	514
30	357.3	60.1	590
32	408.8	68.4	671
34	468.2	77.2	757
36	514.5	86.6	849
38	578.6	96.4	946
40	635.2	106.9	1048
42	700.3	117.8	1155
44	768.5	129.3	1268

## 6X26 (10/5 & 5/5/1) IWRC

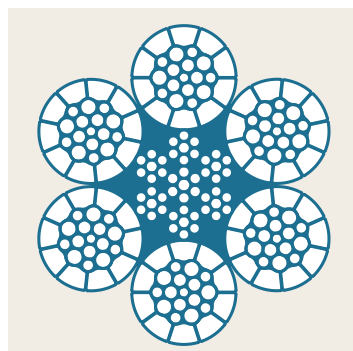

Diameter	Weight	Minimum breaking load	
		Tonnes	kN
mm	kg/100 mtr		
16	115.5	19.1	187
18	145.3	24.1	237
20	183	29.8	292
22	216.6	36.0	353
24	254.7	42.9	420
26	307.2	50.3	493
28	351.7	58.4	572
30	403.8	67.0	657
32	461.1	76.2	748
34	527.2	86.0	844
36	599.4	96.5	946
38	661.1	107.5	1054
40	725.4	119.1	1168
42	799.3	131.3	1288
44	876.3	144.1	1413

This table is for guidance purposes only with no guarantee or warranty (express or implied) as to its accuracy. The products described may be subject to change without notice, and should not be relied on without further advice from Bridon-Bekaert. The cross section image is for reference only. Actual cross sections vary due to diameter. Visit [www.bridon-bekaert.com](http://www.bridon-bekaert.com) for the most up-to-date data. All products are available with 'Zincal' or Bezinol 3000.