


# Dramix® 3D

# 45/35BL

↑
↑
↑
↑  
 Aspect ratio      Length      Bright      Loose

## Concrete Reinforcement

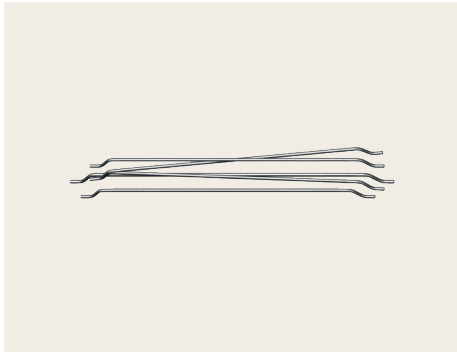

### Original anchorage

Dramix® 3D is the cost-efficient fibre for standard statically indeterminate concrete structures that are subjected to regular static fatigue and dynamic loadings.

### Material properties

Nom. tensile strength:  
**1.225 (N/mm<sup>2</sup>)**  
 Young's modulus:  
**210.000 (N/mm<sup>2</sup>)**  
 Strain at ultimate strength:  
**0,8 %**

### Minimum EN 14889-1 dosage

**30 kg/m<sup>3</sup>**

### Fibre network


**8.639 m/m<sup>3</sup> at 30 kg/m<sup>3</sup>**  
**7.911 fibres/kg**

### Geometry

fibre family



Length (l) \* / Diameter (d)




Aspect ratio (l/d): **45**

\* Indicative value


### Packaging

BAGS:  
**20 kg**

BIG BAG:  
**800 - 1000 kg**



### Handling




**NO STACKING**



**KEEP DRY**

### Product certificates\*

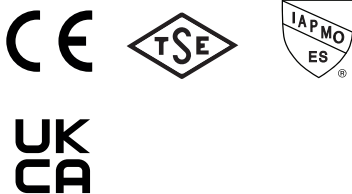

### System certificates\*

Dramix® plants are ISO 9001 and ISO 14001 certified.



### Product conformity

Dramix® conforms to ASTM A820, EN 14889-1 and ISO 13270 Class A.

### Contact us:

For inquiries and orders on [www.construction.bekaert.com/contact](http://www.construction.bekaert.com/contact)



For recommendations on stacking, handling, dosing and mixing, visit [www.bekaert.com/dosingfibers](http://www.bekaert.com/dosingfibers)

Any other specific document or certificate can be found on [www.construction.bekaert.com/resources](http://www.construction.bekaert.com/resources)

\* Product and system certificates are plant specific.