


# Dramix® 3D

# 65/50GG

Aspect ratio      Length      Galvanized      Glued

## Concrete Reinforcement

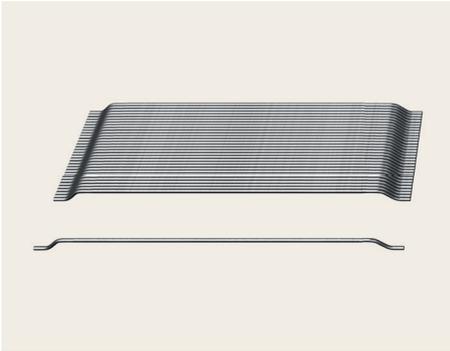

### Original anchorage

Dramix® 3D is the cost-efficient fiber for standard statically indeterminate concrete structures that are subjected to regular static, fatigue and dynamic loadings.

### Glue technology for three-dimensional reinforcement

Dramix® steel fibers are bundled with water-soluble glue. The glue helps to avoid fiber balling during mixing and ensures a homogeneous distribution of fibers throughout the concrete mix.

### Material properties

Nom. tensile strength:

196 ksi (1,350 MPa)

Young's modulus:

30,458 ksi (210,000 MPa)

Strain at ultimate strength:

0.8 %

### Fiber network

2,541 fibers/lb (5,602 fibers/kg)

### Geometry

Fiber family



Length (l) \* / Diameter

← 2.0 in. (50 mm) →



Aspect ratio (l/d) \* : 65


\* Indicative value

### Packaging

BAGS:

44 lb

(20 kg)




BIG BAG:

2,425 - 2,645 lb

(1,100 - 1,200 kg)

### Handling



NO STACKING



KEEP DRY

### Product certificates\*



### System certificates\*

Dramix® plants are ISO 9001 and ISO 14001 certified.



### Product conformity

Dramix conforms to:  
ASTM A820-type I,  
EN 14889-1,  
ISO 13270 class A

### Contact us:

For inquiries and orders on <https://construction.bekaert.com/contact-us>



For recommendations on stacking, handling, dosing and mixing, visit <https://construction.bekaert.com/dosing>

Any other specific document or certificate can be found on <https://construction.bekaert.com/resources>

\* Product and system certificates are plant specific.