


Dramix® 3D 80/60BG

Aspect ratio Length Bright Glued

Concrete Reinforcement

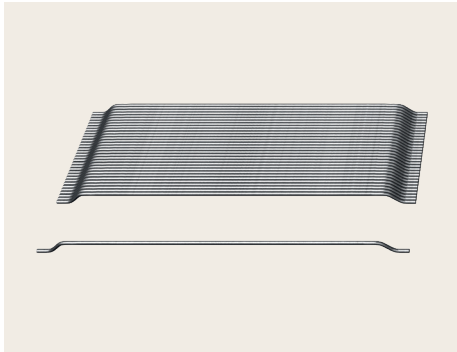

Smart reinforcement for compression layers.

Dramix® Duo 100 is a special engineered mix of Dramix® steel fibres and Duomix® synthetic fibres for an ultra-performant crack control.

Glue technology for three-dimensional reinforcement

Dramix® steel fibres are bundled with water-soluble glue. The glue helps to avoid fibre balling during mixing and ensures a homogeneous distribution of fibres throughout the concrete mix.

Material properties

Nom. tensile strength:
#N/A (N/mm²)
Young's modulus:
210.000 (N/mm²)
Strain at ultimate strength:
0,8 %

Minimum EN 14889-1 dosage

#N/A kg/m³

Fibre network

#N/A m/m³ at #N/A kg/m³
4.690 fibres/kg

Geometry

fibre family



Length (l) / Diameter (d)




#N/A mm


Aspect ratio (l/d): 80

Packaging

BAGS:
10,6 kg



Handling



NO STACKING



KEEP DRY

Product certificates*



System certificates*

Dramix® plants are ISO 9001 and ISO 14001 certified.



Product conformity

Dramix® conforms to ASTM A820, EN14889-1 and ISO 13270 Class A.

Contact us:

For inquiries and orders on www.bekaert.com/contactdramix



For recommendations on: stacking, handling, dosing and mixing, visit www.bekaert.com/dosingdramix

Any other specific document or certificate can be found on www.bekaert.com/dramix/downloads

* Product- and System certificates are plant specific.