


Dramix[®] Ready

Concrete Reinforcement

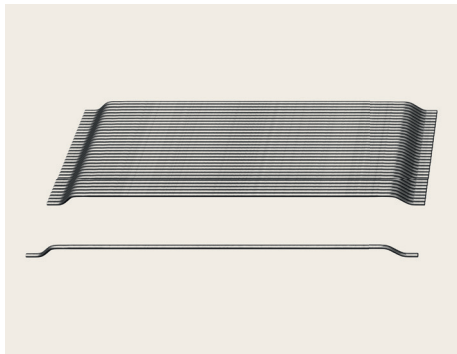

Smart reinforcement for foundation systems for single family homes.

Dramix[®] Ready replaces temperature steel without any adaptation to your concrete mix. This fibre is ready to dose, ready to mix, ready to pump and finish.

Glue technology for three-dimensional reinforcement

Dramix[®] steel fibres are bundled with water-soluble glue. The glue helps to avoid fibre balling during mixing and ensures a homogeneous distribution of fibres throughout the concrete mix.

Material properties

Nom. tensile strength:
1.225 (N/mm²)
Young's modulus:
210.000 (N/mm²)
Strain at ultimate strength:
0,8 %

Minimum EN 14889-1 dosage

8 kg/m³

Fibre network

2.303 m/m³ at 8 kg/m³
4.690 fibres/kg

Geometry

fibre family



Length (l) * / Diameter (d)




Aspect ratio (l/d) *: 80


* Indicative value

Packaging

BAGS:
16 kg



Handling



NO STACKING



KEEP DRY

Product certificates*



System certificates*

Dramix[®] plants are ISO 9001 and ISO 14001 certified.



Contact us:

For inquiries and orders on
<https://construction.bekaert.com/contact-us>



For recommendations on stacking, handling, dosing and mixing, visit
<https://construction.bekaert.com/dosing>

Any other specific document or certificate can be found on
<https://construction.bekaert.com/resources>

Product conformity

Dramix[®] conforms to ASTM A820,
EN 14889-1 and ISO 13270 Class A.

* Product and system certificates are plant specific.