


# Dramix<sup>®</sup> 4D

# 65/50BL

Aspect ratio      Length      Bright      Loose

## Concrete Reinforcement

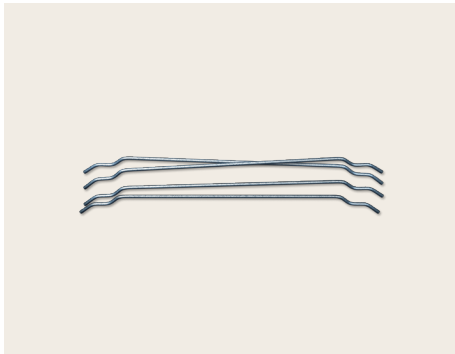

### Optimized anchorage

Dramix<sup>®</sup> 4D provides optimal crack control for standard statically indeterminate concrete structures that are subjected to regular static, fatigue and dynamic loadings with high serviceability requirements.

### Material properties

Nom. tensile strength:  
**261 ksi (1,800 MPa)**  
 Young's modulus:  
**30,458 ksi (210,000 MPa)**  
 Strain at ultimate strength:  
**0.8 %**

### Fiber network

**2,441 fibers/lb (5,382 fibers/kg)**

### Geometry

Fiber family



Length (l) \* / Diameter (d)

← 2.0 in. (50 mm) →




Aspect ratio (l/d) \* : **65**


\* Indicative value

### Packaging

BAGS:  
**44 lb**  
**(20 kg)**



### Handling



NO STACKING



KEEP DRY

### Product certificates\*

### System certificates\*

Dramix<sup>®</sup> plants are ISO 9001 and ISO 14001 certified.



### Product conformity

Dramix<sup>®</sup> conforms to ASTM A820, EN 14889-1 and ISO 13270 Class A.

### Contact us:

For inquiries and orders on [www.construction.bekaert.com/contact](http://www.construction.bekaert.com/contact)



For recommendations on stacking, handling, dosing and mixing, visit [www.bekaert.com/dosingfibers](http://www.bekaert.com/dosingfibers)

Any other specific document or certificate can be found on [www.construction.bekaert.com/resources](http://www.construction.bekaert.com/resources)

\* Product and system certificates are plant specific.