

Dramix® 4D

65/50BL


Aspect ratio

Length

Bright

Loose

Concrete Reinforcement

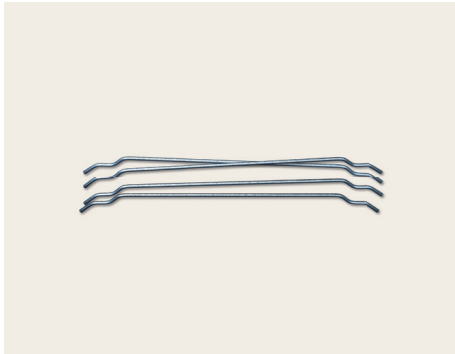

Optimized anchorage

Dramix® 4D provides optimal crack control for standard statically indeterminate concrete structures that are subjected to regular static, fatigue and dynamic loadings with high serviceability requirements.

Material properties

Nom. tensile strength:

261 ksi (1,800 MPa)

Young's modulus:

30,458 ksi (210,000 MPa)

Strain at ultimate strength:

0.8 %

Fiber network

2,441 fibers/lb (5,382 fibers/kg)

Geometry

Fiber family



Length (l) * / Diameter

2.0 in. (50 mm)




Aspect ratio (l/d) * : **65**

* Indicative value


Packaging

BAGS:

**44 lb
(20 kg)**



Handling



NO STACKING



KEEP DRY

Product certificates*

System certificates*

Dramix® plants are
ISO 9001 and
ISO 14001 certified.



Product conformity

Dramix conforms to:
ASTM A820-type I,
EN 14889-1,
ISO 13270 class A

Contact us:

For inquiries and orders on
<https://construction.bekaert.com/contact-us>



For recommendations on stacking, handling,
dosing and mixing, visit
<https://construction.bekaert.com/dosing>

Any other specific document or certificate
can be found on
<https://construction.bekaert.com/resources>

* Product and system certificates are plant specific.