

Dramix® 5D

65/60BG


Aspect ratio

Length

Bright

Glued

Concrete Reinforcement

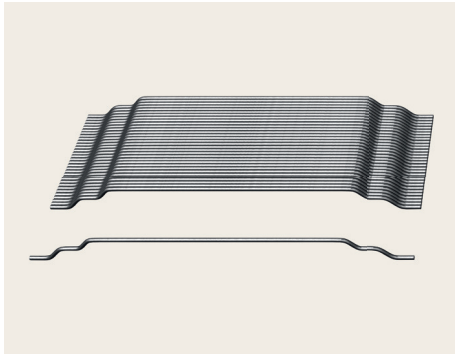

Ultimate anchorage

Dramix® 5D remains firmly anchored inside the concrete. Similar to rebar, the wire slowly elongates taking up tensile stresses. This fiber is the perfect solution for structural applications.

Glue technology for three-dimensional reinforcement

Dramix® steel fibers are bundled with water-soluble glue. The glue helps to avoid fiber balling during mixing and ensures a homogeneous distribution of fibers throughout the concrete mix.

Material properties

Nom. tensile strength:

334 ksi (2,300 MPa)

Young's modulus:

30,458 ksi (210,000 MPa)

Strain at ultimate strength:

6.0 %

Fiber network

1,417 fibers/lb (3,124 fibers/kg)

Geometry

Fiber family



Length (l) * / Diameter

2.4 in. (60 mm)



Aspect ratio (l/d) *: 65

* Indicative value

Packaging

BAGS:


22 / 44 lb

(10 / 20 kg)


BIG BAG:

2,425 - 2,645 lb

(1,100 - 1,200 kg)



Handling



NO STACKING



KEEP DRY

Product certificates*



System certificates*

Dramix® plants are ISO 9001 and ISO 14001 certified.



Product conformity

Dramix conforms to:
ASTM A820-type I,
EN 14889-1,
ISO 13270 class A

Contact us:

For inquiries and orders on

<https://construction.bekaert.com/contact-us>



For recommendations on stacking, handling, dosing and mixing, visit

<https://construction.bekaert.com/dosing>

Any other specific document or certificate can be found on

<https://construction.bekaert.com/resources>

* Product and system certificates are plant specific.